



Mega Catch™

The New Generation Mosquito Trap

PRO 900 Series

ULTRA



Operation Manual

ULTRA Model MCU-900

Important Safety Instructions	1
Introduction	2
Features of Mega-Catch™ Pro 900 Series ULTRA Mosquito Trap	2-3
Initial Set Up Instructions	3-4
What Your Mega-Catch™ Mosquito Trap Will Do	5
Installing and Siting the Mega-Catch™ Mosquito Trap	5-6
Mega-Catch™ Trolley	7-8
Stand Assembly Instructions	9
Mega-Catch™ Variable Quantity Slow CO ₂ Gas Release System	10
Connecting the Pro 900 Series ULTRA to the CO ₂ Gas Supply	11-12
Operation of Variable Quantity Slow CO ₂ Gas Release System	12-13
CO ₂ Gas Suppliers	13
Operation of the LCD Module	14-21
Quick Start	15
Mosquito Catching Systems	22-23
Using the Liquid Catch Container	22
Using the Catch Bag	23
Fitting of External Skirt	24-25
Care of Your Trap	25-26
Replacement of U.V. Tube	26
Optional Accessories	27-28
Maintenance and Repair of Your Trap	29-31
Frequently Asked Questions	32
Problem Solving	33
Need Help?	33
Specifications	33
Parts List	34

Important Safety Instructions

- Do not operate the Trap indoors.
- Do not look directly into the UV lights during operation of the Trap.
- Keep children and pets away from the Trap.
- When the Trap is not in use disconnect power, turn off CO₂ gas and store the Trap and Gas Cylinder out of reach of children.
- Always disconnect power before cleaning, servicing or inspecting the inside of the Trap.
- To avoid injury from the High-Speed Fan inside the Trap, always disconnect power before opening the Door. Keep the Door locked and remove the Key while the Trap is operating.
- Do not allow the Trap, Power Supply, Power Cord or plug to be immersed in water.
- Do not operate the Trap with a damaged Power Supply, Power Cord or plug.
- Use only the Extension Cord supplied with the Trap.
- Ensure Power Cords are placed carefully to avoid causing a tripping hazard.
- Ensure the Trap is properly installed and operated in accordance with this operation manual.
- Before installing or removing the CO₂ Gas Regulator, always ensure that the CO₂ gas is turned off at the Gas Cylinder.

NOTE: We recommend your Mega-Catch™ Mosquito Trap should be used in conjunction with other **sensible mosquito control measures** designed to manage mosquito problems.

Eliminate standing water in low spots, ditches, gutters and similar areas.

Empty or dispose of anything that collects water i.e. tin cans, old tires, buckets, pet dishes, pot plant saucers etc...

Install or repair screens. Some mosquitoes like to come indoors. Keep them outside by having well-fitting screens on both windows and doors.

Keep grass mown and bushes trimmed to deprive mosquitoes of their favorite resting places.

Apply insect repellents when outdoors for extended periods of time. According to the U.S. Centers for Disease Control (CDC), the most effective repellents to use contain one of the following EPA registered active ingredients: DEET (N,N-Diethyl-m-toluamide), Picaridin (KBR 3023) and Oil of Lemon Eucalyptus (p-menthane 3, 8-diol).

Light colored clothing is less attractive to some mosquito species. Wear long sleeves and long pants for added protection.

Introduction


Mosquitoes have been described as the most dangerous creatures on Earth. Aedes mosquitoes may carry yellow fever and dengue fever. Culex mosquitoes may carry several strains of encephalitis (including St. Louis Encephalitis, Eastern Equine Encephalitis and West Nile Virus), and Anopheles mosquitoes may carry Malaria.

Male mosquitoes do not bite. The real risk is from female mosquitoes which bite when in search of blood to provide protein for their eggs.

Scientific research over the past 50 years has shown that female mosquitoes find their prey using a combination of sensory cues including light, shape, color, heat, movement/vibration, sweat and other by-products of human activity. Using that research and with the benefit of extensive field testing (including tests by the United States Department of Agriculture in Gainesville, Florida), Mega-Catch™ has developed one of the world's most advanced mosquito traps: the Mega-Catch™ **Pro 900 Series ULTRA** Mosquito Trap.

There are over 3,500 species of mosquitoes worldwide and your yard could harbor as many as 30 different species. Each species is unique and each is attracted by different combinations of sensory stimuli. Even miniscule changes in those stimuli can mean the difference between catching or not catching a certain species of mosquito. For that reason catching mosquitoes can be compared to fishing. Everyone can do it, but those who are willing to take the time to experiment and learn about the target species will always achieve the best results.

Features of Mega-Catch™ Pro 900 Series ULTRA Mosquito Trap

The Mega-Catch™ **Pro 900 Series ULTRA** Mosquito Trap comes ready to go with preloaded factory default settings so you can get started right away simply by pressing the multi-function button with the Standby Symbol  above (see page 14, Operation of the LCD Module section). The Mega-Catch™ **Pro 900 Series ULTRA** Mosquito Trap has been designed to give you the ability to adjust a range of settings and mosquito attracting stimuli (there are literally thousands of setting combinations available) using the revolutionary **MAS (Mosquito-Attracting-Stimuli)** settings within the trap to maximize mosquito capture in your yard.

Features include:

- 5 stage Central LED Cluster programmed to illuminate and give the appearance of movement.
- 5 stage oscillating ultra violet (U.V.) LED light array spectrally matched to frequencies known to attract many mosquito species.
- 5 stage fan to maximize capture rates and allow for live catches (for species identification).
- Low-intensity black light ultra violet (U.V.) cathode tube that emits light in a frequency band known to attract many mosquito species.
- 5 stage Heating Element with adjustable heat mode to subtly alter the infrared signature that attracts many mosquito species.
- Full diagnostics software.

Mosquitoes attracted to the **Pro 900 Series ULTRA** by visual and other cues seek to land on and probe specially designed surfaces and enter the Trap where they are collected in the Catch Bag or Liquid Catch Container.


The **Pro 900 Series ULTRA** also features the Mega-Catch™ Variable Quantity Slow CO₂ Gas Release System. Use of this attractant system is entirely optional. The system enables the **Pro 900 Series ULTRA** to replicate a key element of human respiration by releasing small quantities of carbon dioxide (CO₂). For more information see page 10, **Mega-Catch™ Variable Quantity Slow CO₂ Gas Release System** section.

The Mega-Catch™ **Pro 900 Series ULTRA** Mosquito Trap has been designed for outdoor use only. The **Pro 900 Series ULTRA** can operate unattended for long periods. It can be programmed to start and stop according to peak mosquito activity in your area.

Initial Set Up Instructions

Before attempting operation of your **Pro 900 Series ULTRA** Trap, follow these instructions:

1. Remove the box marked Accessories from the carton.
2. Remove the box containing the Stand from the carton.
3. Assemble the Stand (see page 9, **Stand Assembly Instructions** section).
4. Remove the Trap from the carton (Note: the screen on the LCD module will be blank until power is connected to the trap).
5. Fit the External Skirt to the outside of the Trap by sliding the skirt on from the top of the Trap so that the opening is directly in front of the Door (see page 24, **Fitting of External Skirt** section).
Note: Failure to position the Skirt correctly may result in a NIL mosquito catch.
6. Hang the Trap from the hook on the Stand in the direction shown in the Stand Assembly Instructions. To achieve this, hold the Trap in an upright position so that the top of the Trap is next to the hook on the stand. Then swing the bottom of the Trap outwards (through an arc of about 45 degrees) and you will see that the top of the Trap will fit through the gap in the hook. This is a design feature to prevent the Trap falling off the stand accidentally.
7. Your **Pro 900 Series ULTRA** Trap has two mosquito collection methods: a dry-catch system using a Catch Bag and a wet catch system using a Catch Container. In most circumstances the wet-catch system offers superior catch performance to the dry-catch system. The dry-catch system using the Catch Bag is better for mosquito species identification.

8. If you wish to catch mosquitoes using the Catch Bag, then attach the Catch Bag to the base of the Fan inside the Trap. The Catch Bag has an elastic top to facilitate attachment (see page 22, **Mosquito Catching Systems** section).
9. If you wish to catch mosquitoes using the wet-catch system, fill the Liquid Catch Container two-thirds full with fresh water. Add 2 or 3 drops of liquid detergent/soap to break the surface tension of the water. Also add 3 or 4 teaspoons of a non-diet (sugar-based) soda pop or fruit juice. Then place the Liquid Catch Container in the Trap using the locating feet on its base.
10. Reinstall the Door by locating the base of the Door in the Trap and then pushing firmly until Door clicks into place. Lock the Door using one of the two Keys provided with the Trap and then remove the Key. (**NOTE:** Removing and reinstalling the door is designed to require a reasonable amount of force to make it difficult for children).
11. The **Pro 900 Series ULTRA** Trap comes with the patented Mega-Catch™ Variable Quantity Slow CO₂ Gas Release System. Use of this system is entirely optional (see page 10, **Mega-Catch™ Variable Quantity Slow CO₂ Gas Release System** section). If using the Mega-Catch™ Variable Quantity Slow CO₂ Gas Release System then you will first need to obtain a CO₂ cylinder (see page 13, **CO₂ Gas Suppliers** section). Having obtained a CO₂ cylinder, connect the Low-Pressure Gas Regulator (supplied with the Trap) to the Gas Cylinder ensuring beforehand that the nylon washer inside the Gas Regulator Nut is properly in place and undamaged. Then connect the Regulator to the Trap (see page 11, **Connecting the Pro 900 Series ULTRA to the CO₂ Gas Supply** section). Slowly turn on the CO₂ gas checking for leaks.
12. Your **Pro 900 Series ULTRA** Trap comes with a low-voltage Power Supply and a 60-foot(18 metre) low-voltage extension cord with weatherproof connectors. Plug the extension cord into the Trap connection turning the connector clockwise until tight. Plug the extension cord into the power supply cable turning the connector clockwise until tight. Then plug into the power supply. (**NOTE:** The connectors are designed to be a tight fit to ensure that they are weatherproof).
13. Turn on the power. The Trap will take around 2 seconds to initialize and then a display should appear on the screen of the LCD Module and a blue LED light inside the Trap should pulse to indicate that power is connected. (If it does not, see page 33, **Problem Solving** section). To immediately begin operating your Trap at the factory default settings press the multi-function button with the Standby Symbol  above it (see page 14-21, **Operation of the LCD Module** section for programming instructions).
14. When the Trap is operating, the Fan should be running, the U.V. and colored LED lights should be flashing intermittently, the U.V. Tube should be on (unless the U.V. tube has been programmed off) and the Trap should “click” every 75-80 seconds (unless the CO₂ gas has been programmed off). If the Trap is not operating correctly then re-read these instructions or see page 33, **Problem Solving** section, or email us at info@megacatch.com.

What Your Mega-Catch™ Mosquito Trap Will Do

While the Mega-Catch™ Mosquito Trap has been designed to catch immediately there is any mosquito activity in the vicinity, it may take as much as 6-8 weeks of use to reduce local populations to the point that breeding cycles are interrupted. Patience and experimentation are the keys to getting the best out of your Mega-Catch™ Mosquito Trap. Subsequent re-infestations will probably occur after rain.

You should not expect to completely get rid of mosquitoes. Mega-Catch™ Mosquito Traps should be used in conjunction with other sensible **mosquito control measures** (see “NOTE” page 1, **Important Safety Instructions** section) designed to manage mosquito problems.

The Mega-Catch™ Mosquito Trap is not designed to compete with humans in close proximity eg. at a barbecue. If you are planning an outdoor function, operate the Trap for several days before the function.

Installing and Siting the Mega-Catch™ Mosquito Trap

Installation of Trap:

Your Mega-Catch™ Mosquito Trap comes fully assembled. To install refer to the instructions on Page 3, **Initial Set Up Instructions** section.

The Initial Set Up Instructions assume that you have decided to install your Mega-Catch™ Mosquito Trap on the Stand that is supplied with the Trap.

Alternatively, the Trap can be installed on a Mega-Catch™ Trolley which can be purchased as an optional accessory (see page 7-8, **Mega-Catch™ Trolley** section), or hung from a tree or fixed post using a chain/rope (or the like) connected to the attachment hole at the top of the trap. We recommend a height of around 3 feet(1 metre) from the ground to the top of the Mega-Catch™ Mosquito Trap. However, you may need to adjust the Trap's height depending on the type of mosquitoes you are catching.

Your Mega-Catch Mosquito Trap is supplied with a 60 foot(18 metre) low voltage extension cord with weatherproof fittings. To avoid the cord posing a tripping hazard or being damaged, (e.g. by lawn mower) we recommend that, if possible, it be placed 2-3 inches(5-8 cm) underground. This can be easily achieved by using a spade which is inserted into the ground and moved backwards and forwards to create a shallow slit trench into which the cord can be pushed before the ground is replaced by standing on the top of the slit trench.

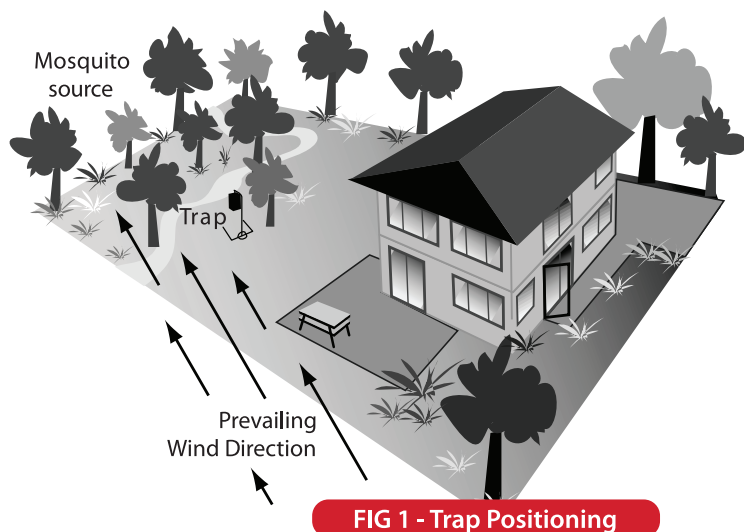


FIG 1 - Trap Positioning

Siting of Trap:

For the best performance from your Mega-Catch™ Mosquito Trap, first determine the primary source of the mosquito nuisance (Mosquitoes breed in wet areas like around streams, marshland, wooded areas and gardens). Then use these rules to site the Trap:

- Rule 1: Place the Trap between the mosquito source and areas of human activity.
- Rule 2: Place the Trap as far away from people and as close to the mosquito source as possible (attract them to the Trap and not to you).
- Rule 3: Place the Trap upwind of the mosquito source but only if you can comply with Rule 1 (mosquitoes sometimes use the wind to navigate).
- Rule 4: Place the Trap in a predominantly shaded area (most mosquitoes avoid direct sunlight).
- Rule 5: Place the Trap in a location protected from rain and strong wind (mosquitoes don't fly in strong winds).
- Rule 6: If severe weather conditions, such as a cyclone, are predicted then store the Trap out of the weather.

Mega-Catch™ Trolley

The Mega-Catch™ Trolley is an optional accessory for use in conjunction with the **Pro 900 Series ULTRA Trap**. Assembly of the Mega-Catch™ Trolley is a simple procedure if you follow the directions shown in figures 2.1 to 2.3:

FIG 2.1 - Trolley Assembly

When trolley assembly is complete, hang trap from hook through fitting on top of the trap, then connect power plug and gas line.


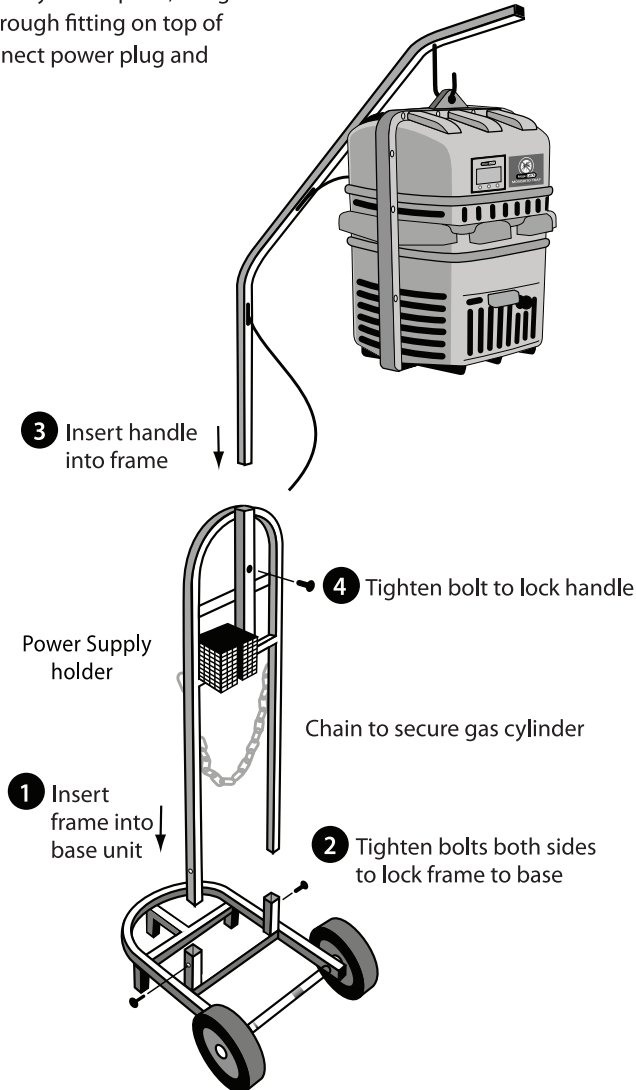


FIG. 2.2 Trolley assembly

Complete with CO₂ cylinder and power supply installed

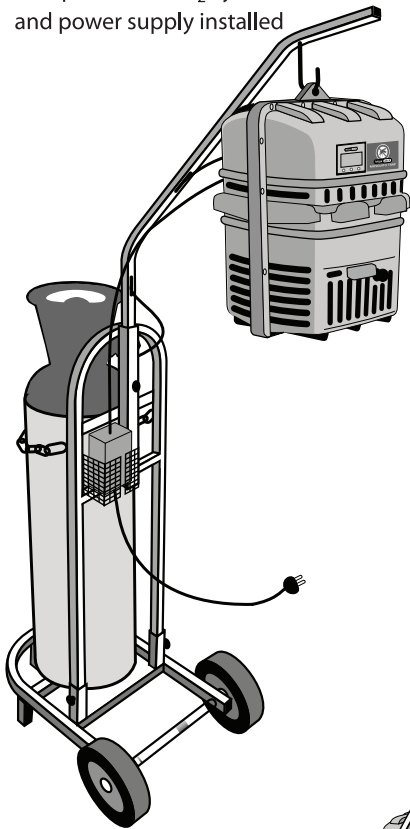

The Mega-Catch™ Trolley has been designed to hold a 20lb CO₂ Gas Cylinder for use in conjunction with the **Pro 900 Series ULTRA** Trap.

If you wish to install a Mega-Catch™ Mosquito Trap on a Mega-Catch™ Trolley without a CO₂ Gas Cylinder in place then the handle on the Trolley should be reversed. We also recommend that a stability weight (e.g. a cement/cinder block) of at least 10lbs be placed on the Trolley in the manner shown in figure 2.4 below.

While your Mega-Catch™ Trolley is zinc-plated and powder-coated, when not in use, we recommend that it be stored out of the weather.

FIG. 2.4 Trolley assembly option

For use without CO₂ gas cylinder


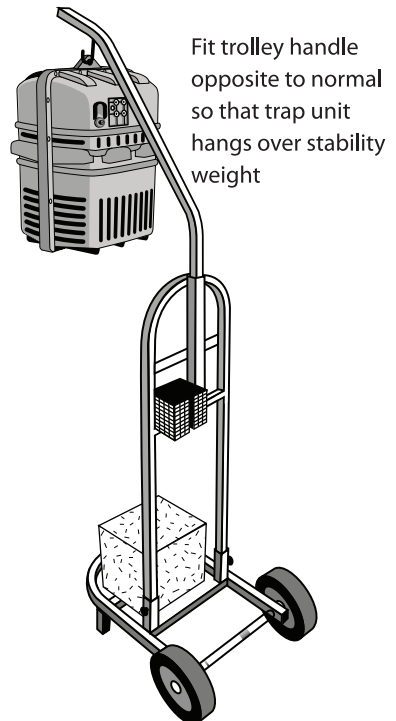


FIG. 2.3 Trolley assembly

Complete with weatherproof cover fitted

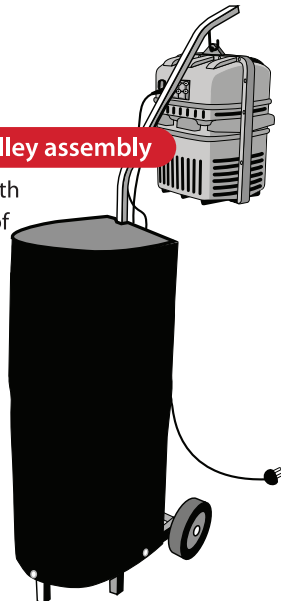

Stand Assembly Instructions

To assemble the Stand supplied with the Trap, follow the instructions shown in figure 3.1 below.

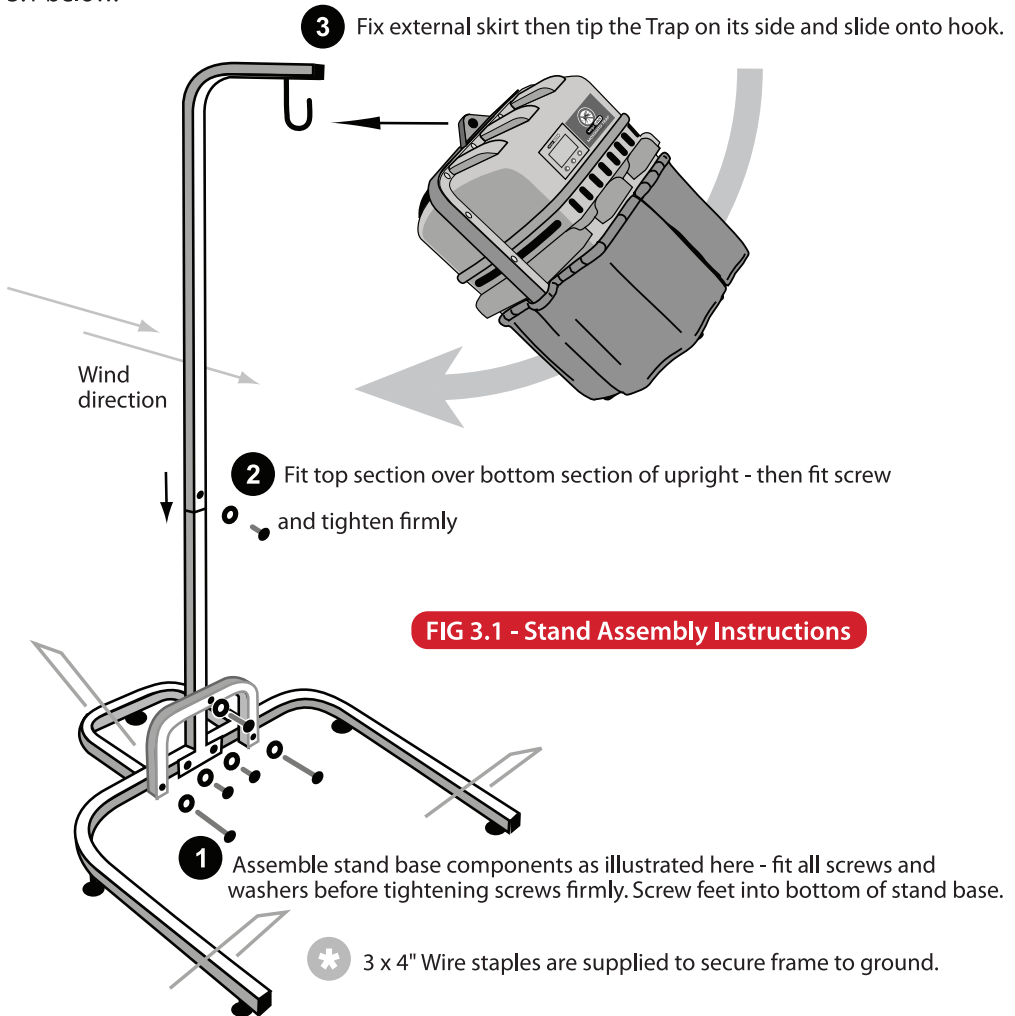


FIG 3.1 - Stand Assembly Instructions

NOTE: For optimum performance place the trap in a predominantly shaded area (located between your dwelling and the source of the mosquitoes) which is protected from rain and wind (Mosquitoes do not fly in strong winds or severe weather conditions). For maximum stability the 'U' shaped leg at the back of the stand should be pointed in the direction of prevailing winds. The wire staples supplied with the trap (or a cinder block placed on the back of the stand) can be used to increase stability.

Mega-Catch™ Variable Quantity Slow CO₂ Gas Release System

Mosquitoes find their prey using a vast array of sensory signals including light, shape, color, heat, movement/vibration and various chemical compounds produced by humans and other animals. One of these compounds is carbon dioxide or CO₂. Most conventional traps rely on CO₂ gas to attract mosquitoes. They usually achieve this by burning flammable liquids like propane. Carbon dioxide gas is one by-product of that combustion process.

Mega-Catch™ Traps on the other hand need no CO₂ to attract mosquitoes. Using advanced design features and sophisticated electronic components, Mega-Catch™ Traps exploit a wide range of sensory signals to attract mosquitoes.

Mega-Catch™ also offers its own carbon dioxide attractant system using its patented “Variable Quantity Slow CO₂ Gas Release System”. The latest version of this system is now a standard feature on all Mega-Catch™ **Pro 900 Series ULTRA** model Traps.

Use of this attractant system is entirely optional i.e. while the system is designed to increase capture rates it is not essential to the effective operation of the Trap. Even without the system, or with the system turned off, your Mega-Catch™ **Pro 900 Series ULTRA** Mosquito Trap has been designed to catch mosquitoes and other biting insects.

Conventional Traps which burn propane release CO₂ gas in a continuous stream as part of the exhaust gases from the propane combustion process. Mega-Catch™’s Variable Quantity Slow CO₂ Gas Release System is designed to replicate a key element of human respiration by releasing quantities of pure CO₂ gas at an exponentially decaying (negative) rate over fixed intervals to produce a concentration gradient in the air plume emanating from the lower part of the Trap. Mosquitoes use this concentration gradient to navigate their way to the Trap.

The Mega-Catch™ system is able to release more CO₂ (and in a cleaner and purer form) than propane burning traps by using carbon dioxide in the same cylinders as those used by the beverage industry to aerate (put bubbles into) the likes of beer, soda pop and sparkling mineral water. CO₂ gas in this form is able to be purchased from hundreds of gas supply outlets throughout North America and elsewhere (see page 13, **CO₂ Gas Suppliers** section).

ATTENTION: DO NOT OPERATE THE PRO 900 SERIES ULTRA TRAP INDOORS

Connecting the Pro 900 Series ULTRA to the CO₂ Gas Supply

Before attempting to use the Variable Quantity Slow CO₂ Gas Release System you must first follow these instructions (also see figure 3.2 below):

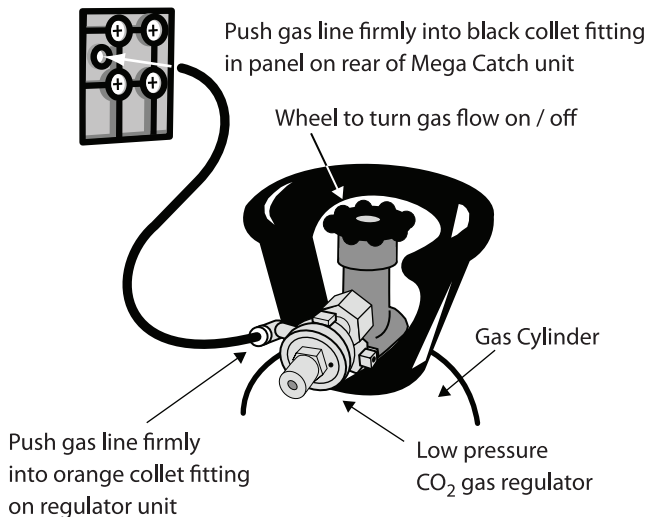


FIG 3.2 -Connection of trap to CO₂ gas cylinder

1. The **Pro 900 Series ULTRA** comes with a low-pressure CO₂ gas regulator and a length of low pressure gas line to connect the Regulator to the Trap.
2. Check to ensure that the Nylon Washer inside the Gas Regulator Nut is properly in place and undamaged. (Note: the gas pressure setting of the Gas Regulator has been set in the factory to around 35 PSI and should not be adjusted).
3. Attach the Gas Regulator onto the threaded section of the Gas Cylinder and tighten firmly using a suitable sized wrench. Note: if the threads do not match then contact your gas supplier (see page 13, **CO₂ Gas Suppliers** section).

ATTENTION: Do not turn on the CO₂ gas supply from the Gas Cylinder until you have fitted the low-pressure Gas Regulator. Direct contact with high pressure CO₂ may result in injury. CO₂ Gas Cylinders (empty or full) which do not have a low-pressure Regulator firmly connected should be securely locked away out of reach of children. We recommend that CO₂ Gas Cylinders be moved around using a Mega-Catch™ Trolley which has been specially designed for this purpose (the Mega-Catch™ Trolley is an optional accessory available from your Authorized Distributor or online at www.megacatch.com).

4. Push one end of the gas line firmly into the orange collet fitting on the Gas Regulator unit. Push the other end of the gas line firmly into the black collet fitting in the panel on the rear of the Mega-Catch™ unit (see figure 3.2). Gradually turn on the CO₂ gas by turning the wheel on the top of the Gas Cylinder in an anti-clockwise direction.

5. Check for gas leaks from the Gas Cylinder, the Regulator and the gas line using a small quantity of liquid detergent/soap thoroughly stirred in some water (mix 50% detergent with 50% water). Simply brush, spray or pour this over the items to be checked. Leaks can be detected by the appearance of bubbles. If a leak is detected then turn off the CO₂ gas by turning the wheel on the Gas Cylinder clockwise. Then disconnect the Gas Regulator and check that the Nylon Washer is in place and is undamaged and then repeat the process. If a leak is detected around where the low pressure gas line connects to one of the collets then remove the low pressure gas line(see to 6. below) and cut a 1/2" off the end of it to remove any possible gouges/burrs. Reinsert and test again. If there is still a leak from the Gas Cylinder or the Gas Regulator see your gas supplier (see page 13, **CO₂ Gas Supplier** section) or email us (info@megacatch.com).
6. To remove the gas line first turn the CO₂ gas off by turning the wheel on top of the Gas Cylinder in a clockwise direction. Next "bleed" the line pressure by letting the trap run for 3 minutes or so on a high gas setting eg. #5. Once the line pressure has been bled simply use two fingers to push the sides of the plastic collet fitting inwards then, using the other hand, firmly pull the gas line out of the collet fitting. (**Note:** the collets are the orange fitting at the Regulator connection and the black fitting at the Trap connection, see figure 3.2).

TIP: To check the CO₂ Gas Cylinder gas level you can begin by weighing the empty CO₂ Gas Cylinder on some bathroom scales, or the like, to get a record of what an empty cylinder with attachments weighs. Then periodically weigh the CO₂ Gas Cylinder again to get an indication of how full it is. Alternatively you can also disconnect the small black low pressure gas line and check is there is a flow of CO₂ (turn cylinder valve off, remove tube and then slowly turn back on to check). Once you have used the trap for a reasonable amount of time you will get an idea of when to start checking (a Mega-Catch™ Gas Regulator with gauge is also available as an optional accessory from your Authorized Distributor or online at www.megacatch.com).

ATTENTION: BEFORE INSTALLING OR REMOVING THE GAS REGULATOR ALWAYS ENSURE THE GAS IS TURNED OFF BY TURNING THE ON/OFF WHEEL ON THE GAS CYLINDER CLOCKWISE.

Operation of Variable Quantity Slow CO₂ Gas Release System

You can adjust the quantity of CO₂ gas being released from the **Pro 900 Series ULTRA** Trap with a simple adjustment of the CO₂ gas setting via the LCD module (see page 19, **CO₂ Gas** section).

On setting # 1, a 20lb CO₂ Gas Cylinder can be operated continuously (i.e. 24 hours per day) for over 6 months. Continuous use of the Trap on higher settings can waste CO₂ gas. We recommend that the Trap be operated for no more than 8 hours a day at times so as to coincide with peak mosquito activity. This might be increased to 12 hours a day if you are experiencing a particularly heavy infestation of mosquitoes.

To run the Trap only at certain hours of the day see page17, **Setting the Timer** section. There is also an advanced option where you can run the Trap continuously while having CO₂ Gas released only at times of peak mosquito activity (see page 20, **Setting the Gas Timer** section).

If you operate your Mega-Catch™ Mosquito Trap with CO₂ in accordance with our recommendation of no more than 8 hours per day, then you can expect a 20lb CO₂ Gas Cylinder to last as follows:

Gas Select #	Approximate Duration
# 1	In excess of 1 year
# 2	125 days
# 3	45 days
# 4	30 days
# 5	22 days

We recommend that you choose setting # 2 or # 3 for normal Trap operation. In preparing for an outdoor function, you might wish to operate the Trap on setting # 4 or # 5 for a limited period, e.g. 12 hours per day for 2 or 3 days.

CO₂ Gas Suppliers

Mega-Catch™ Mosquito Traps equipped with the Variable Quantity Slow CO₂ Gas Release System (standard on the **Pro 900 Series ULTRA**) use CO₂ gas which can be purchased from hundreds of gas supply outlets throughout North America (and elsewhere). Major gas distributors include PraxAir, Air Products, BOC Gases and Air Liquide. Refer to our website: www.megacatch.com for store locations of major CO₂ gas distributors in North America (and elsewhere). Alternatively, look in your Yellow Pages, or search the Internet under Industrial Gases or Welding Supplies.


We recommend that you purchase CO₂ in 20lb aluminium cylinders available from your Authorized Distributor or online at www.megacatch.com.

Operation of the LCD Module


LCD Module



The LCD (Liquid Crystal Display) Module provides the user with easy access to the trap settings by way of an LCD screen which has 3 multi-function buttons located at the bottom of the screen(see figure 4.1). The current function of each multi-function button is displayed directly above on the LCD screen. The LCD screen has a back light for operation in low light conditions (the back light automatically turns on momentarily whenever a function button is pressed).

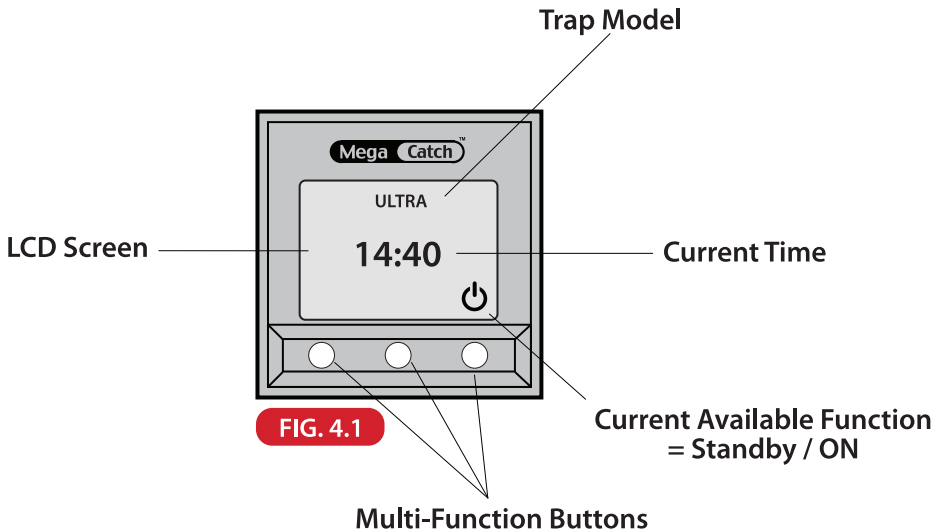Note: If a multi-function button has not been pressed for some time then the screen will revert back to the Main Screen (see figure 4.1) and any settings shown on the screen will be saved.





Standby Symbol

Pressing the multi-function button with the Standby Symbol  above it will turn the trap ON. Pressing the same multi-function button again will put the trap into Standby/Sleep mode. Standby/Sleep mode essentially turns the trap OFF and while in this state the Trap uses practically no power.

- When the Trap is in Standby/Sleep mode then pressing  will turn the Trap ON.
- When the Trap is ON and running then pressing  will put the Trap into Standby/Sleep mode. All trap operations will stop except for a pulsing blue LED light inside the Trap to indicate that the trap has power connected.

Quick Start

With the trap set up and plugged in press the multi-function button with the Standby Symbol  above it. The trap will now run (turn on) 24 hours a day while connected to a power source. To turn the trap OFF then again press the multi-function button with the Standby Symbol  above it (see figure 4.2). It is that easy.

The Trap comes configured with factory default settings for the Fan, Heater, U.V. tube, U.V. LEDs, Central LED Cluster and CO₂ Gas that will be suitable for most mosquito capturing operations. Altering the settings to best “tune” the trap to your particular mosquito environment is optional (see below, **Adjusting Trap Settings** section).

To program specific times of the day when you would like your Mega-Catch™ Mosquito Trap to run see page 17, **Setting the Timer** section.

To reset the trap back to the factory default settings see page 21, **Resetting the Trap** section.

Adjusting Trap Settings

With the trap on and running the LCD Module screen will look similar to the one shown below in figure 4.2.

To access and view/alter the trap settings press the multi-function button that says “MENU” above it. Pressing this button will progress you through to the Main Menu screen where you will be able to adjust trap settings to optimize the operation of your trap.




FIG. 4.2

Main Menu

Standby / ON

To scroll through the menu use the multi-function buttons which have the Up ↑ and Down ↓ arrows above them. The current selection, along with its current setting, will be highlighted on the screen with a solid black box behind the text (see figure 4.3). Press the multi-function button with “OK” above it to adjust the setting for the current highlighted selection.

Note: Settings will be saved when trap is turned off.

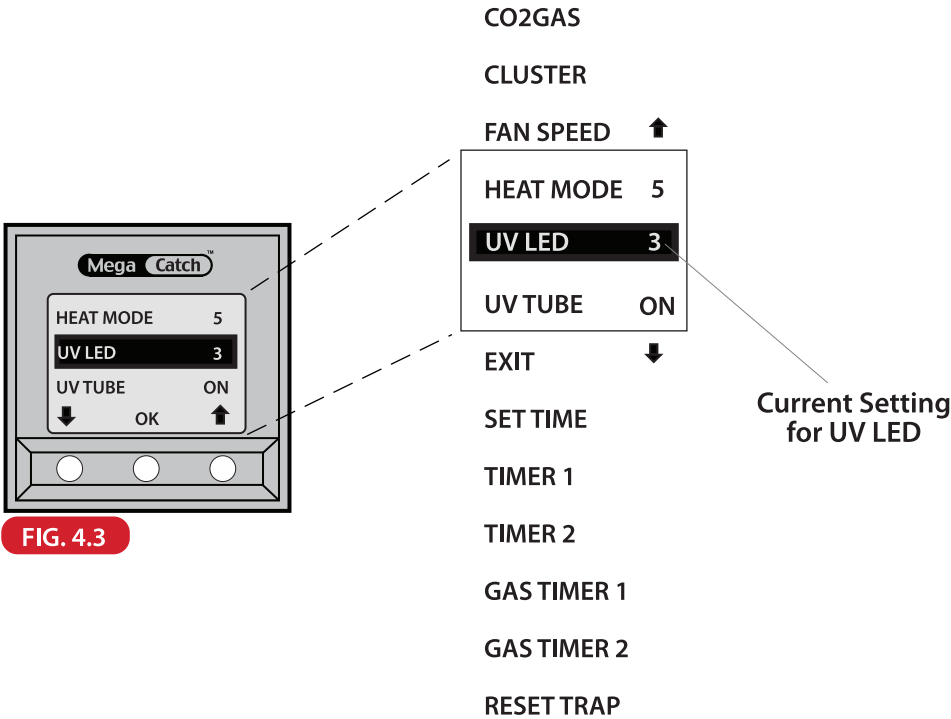


FIG. 4.3

Setting the Time

Select “SET TIME” from the Menu.

Using the Up ↑ or Down ↓ arrow adjust the Time then press “OK” to accept and exit back to the Main Menu (see figure 4.4).

Note:

- Time is in 24 hour format eg. 2pm equates to 14:00.
- To quickly advance through the minutes/hours press and hold the Up ↑ or Down ↓ arrow.



FIG. 4.4

Setting the Timer

The Timer function enables you to program the Trap to operate at the time/s of the day/night which you choose eg. when mosquitoes are most active in your area. There are 2 Trap Timers available and either, or both, of these can be used. Use of both Timers allows the user to program in two periods of operation during a 24 hour period (i.e. daytime and night-time).

Select "TIMER 1" or "TIMER 2" from the Menu and press "OK". The Start Time will appear on the screen with "ON" displayed to the right of the time (see figure 4.5).

Using the Up ↑ or Down ↓ arrow set when you would like the Trap to turn ON then press "OK".

"OFF" for Off Time will now appear on the screen to the right of the time (see figure 4.6).

Using the Up ↑ or Down ↓ arrow set when you would like the Trap to turn OFF then press "OK" to accept and exit back to the Main Menu.

When a Timer has been set the Timer symbol ⌚ will be displayed to the left of the Main Menu screen (see figure 4.7).

Note:

- Before setting the Timer firstly ensure that the time has been set (see page 16, **Setting the Time** section).
- Time is in 24 hour format eg. 2pm equates to 14:00.
- To quickly advance through the minutes/hours press and hold the Up ↑ or Down ↓ arrow.
- To edit a Timer once set see below, **Editing the Timer** section.

Setting Range: OFF or ON.

Factory Default Setting: OFF

Editing the Timer

To change the ON/OFF times for a Timer select the Timer from the Menu and press "OK" then press "EDIT" (see figure 4.8). Next follow the steps above in **Setting the Timer** to enter the ON and OFF times.

To disable an active Timer select the Timer from the Menu and press "OK" then press "OFF" (see figure 4.8).




FIG. 4.5




FIG. 4.6




FIG. 4.7

Indicates That a
Timer
Has Been Set.




FIG. 4.8

U.V. Tube

The U.V. Tube emits a light wavelength within the range that is effective in attracting many mosquito species. Note: The U.V. Tube light wavelength is different to that emitted by the U.V. LED lights.

Select “**UV TUBE**” from the Menu and press “**OK**”.

Select “**OFF**” or “**ON**” to accept and exit back to the Main Menu.

Setting Range: OFF or ON.

Factory Default Setting: ON




FIG. 4.9

U.V. LEDs

The flashing U.V. LED lights, located around the perimeter of the Control Box, emit a light wavelength within the range that is effective in attracting many mosquito species. Note: The U.V. LED light wavelength is different to that emitted by the U.V. Tube. Varying the U.V. LED intensity will vary the response from different mosquito species.

Select “**UV LED**” from the Menu and press “**OK**”.

Use the Up ↑ arrow to increase or the Down ↓ arrow to decrease the U.V. LED intensity then press “**OK**” to accept and exit back to the Main Menu.

Setting Range: OFF to level 5.

Factory Default Setting: 3




FIG. 4.10

Cluster

The Cluster refers to the Central LED Cluster or colored LED lights at the base of the Control Box that create the illusion of movement, or a live object inside the trap.

Select “**CLUSTER**” from the Menu and press “**OK**”.

Use the Up ↑ arrow to increase or the Down ↓ arrow to decrease the Central LED Cluster rotation speed then press “**OK**” to accept and exit back to the Main Menu.

Setting Range: 1 to level 5.

Factory Default Setting: 3




FIG. 4.11

Heat Mode

Heat Mode sends a signal to the heater element to subtly change the heat profile.

Select "HEAT MODE" from the Menu and press "OK".

Use the Up ↑ arrow to increase or the Down ↓ arrow to decrease the time between each Heat Mode change then press "OK" to accept and exit back to the Main Menu.

Setting Range: 1 to level 5.

Factory Default Setting: 5




FIG. 4.12

Fan Speed

Fan Speed sets the rotational speed of the fan and, due to the resultant airflow change, will also subtly alter the effective heat profile of the heater element. Lower Fan speeds also better preserve captured mosquitoes for later species identification.

Select "FAN SPEED" from the Menu and press "OK".

Use the Up ↑ arrow to increase or the Down ↓ arrow to decrease the Fan Speed setting then press "OK" to accept and exit back to the Main Menu.

Setting Range: 1 to level 5.

Factory Default Setting: 3




FIG. 4.13

CO₂ Gas

The CO₂ gas setting adjusts the quantity of CO₂ gas (a component of human respiration and a sensory attractant for mosquitoes) released by the Variable Quantity Slow CO₂ Gas Release System.

Select "CO₂ GAS" from the Menu and press "OK".

Use the Up ↑ arrow to increase or the Down ↓ arrow to decrease the the amount of CO₂ gas released then press "OK" to accept and exit back to the Main Menu.

Setting Range: OFF to level 5.

Factory Default Setting: 2




FIG. 4.14

Setting the Gas Timer

The Gas Timer is a specialty Timer function that enables you to have even more control over when CO₂ Gas is released from the Trap. It is suitable for use in situations for example when you want to run your Trap continuously for 24 hours a day however only want to use CO₂ Gas for say 8 hours of the day. There are 2 Gas Timers available and either, or both, of these can be used.

Select “GAS TIMER 1” or “GAS TIMER 2” from the Menu and press “OK”. The Start Time will appear on the screen with “ON” displayed to the right of the time (see figure 4.15).

Using the Up ↑ or Down ↓ arrow set when you would like the Trap to start releasing CO₂ Gas then press “OK”.

“OFF” for Off Time will now appear on the screen to the right of the time (see figure 4.16).

Using the Up ↑ or Down ↓ arrow set when you would like the Trap to stop releasing CO₂ Gas then press “OK” to accept and exit back to the Main Menu.

As with Timers 1 & 2 when a Gas Timer has been set the Timer symbol ⌚ will be displayed to the left of the Main Menu screen (see figure 4.17).

Note:

- Before setting a Gas Timer firstly ensure that the time has been set (see page 16, **Setting the Time** section)
- Time is in 24 hour format eg. 2pm equates to 14:00.
- To quickly advance through the minutes/hours press and hold the Up ↑ or Down ↓ arrow.
- The Gas Timer uses the current CO₂ Gas level setting e.g. 2.
- The Gas Timer is an overlay Timer and does not turn the Trap ON or OFF. It only comes into effect during times that the Trap is already turned, or programmed (via Timer 1 or Timer 2), ON.
- To edit a Gas Timer once set see page 17, **Editing the Timer** section.

Setting Range: OFF or ON.

Factory Default Setting: OFF




FIG. 4.15




FIG. 4.16




FIG. 4.17

Diagnostics

Diagnostics can be used to check the module status of the U.V. Tube, Fan, Heater and Solenoid (for the Variable Quantity Slow CO₂ Gas Release System). This may be useful on the rare occasion that a module is not behaving as expected.

Ensure that the Trap is plugged in and in Standby/Sleep mode (the display will look similar to that shown in figure 4.18 and the blue LED inside the trap will be slowly pulsing).




FIG. 4.18

Momentarily press and hold the multi-function buttons on the center and on the left until the word **"DIAGNOSTIC"** appears at the top of the screen (see figure 4.19). The Trap will now perform a self-diagnostic check and report back with the **"OK"** or **"FAIL"** status for:

TUBE : U.V. Tube

FAN : Fan

HEAT : Heater Element

GAS : Solenoid for the Variable Quantity Slow CO₂ Gas Release System

Press Together




FIG. 4.19

Example: The Trap has not been catching any mosquitoes this week compared with the many mosquitoes captured the previous week. A diagnostic check is run and the results found are shown in figure 4.20 with the Fan reporting a **"FAIL"** status. The Fan is inspected and it is found that a very large beetle is obstructing the fan blades from turning. Once the beetle has been removed the trap then begins functioning correctly again. Another diagnostic check is run and now shows that the Fan status is **"OK"**.




FIG. 4.20

Resetting the Trap

Resetting the Trap will restore the factory default settings for the Fan, Heater, U.V. tube, U.V. LEDs, Central LED Cluster and CO₂ Gas settings. The Time and all Timer ON/OFF times will remain unchanged however all Timers will be turned off.

Select **"RESET TRAP"** from the Menu and press **"OK"**.

Select **"YES"** to confirm restoration of factory default settings, or **"NO"** to cancel, and exit back to the Main Menu (see figure 4.21).




FIG. 4.21

Mosquito Catching Systems

Your Mega-Catch™ Mosquito Trap comes complete with a Catch Bag and a Liquid Catch Container. You may choose to collect mosquitoes using either of these systems.

Our research has shown the Liquid Catch Container system to be more effective. This is because when the Mega-Catch™ Mosquito Trap is operated using a Liquid Catch Container, the air plume emanating from the bottom of the Trap is humidity enriched.

Depending on local temperatures, evaporation may mean that it is necessary to replenish water in the Liquid Catch Container weekly or even more frequently. The Catch Bag system requires less frequent attention and therefore may be your preferred mosquito catching system. We recommend the Catch Bag system if your trap is going to be left unattended for any long period of time (e.g. vacation). Smaller biting insects (eg: no-see-ums) are best caught using the Liquid Catch Container because the mesh size on the standard Catch Bag may be too large to capture them (a smaller mesh Catch Bag is available from your Authorized Distributor or online at www.megacatch.com).

Using the Liquid Catch Container

To prepare your Mega-Catch™ Mosquito Trap, follow these steps:

1. Ensure that the Trap is switched off by disconnecting the power (**Attention: High-Speed Fan inside the Trap may cause injury if the power is not disconnected.**)
2. Unlock and remove the Lockable Door.
3. Slide the Liquid Catch Container out from beneath the Fan. This container has locating feet on its base.
4. Fill the container with water until it is approximately two-thirds full. Add 3 or 4 drops of liquid detergent/soap and stir thoroughly. This breaks the surface tension of the water ensuring that mosquitoes drown upon capture.
5. Add 3 or 4 teaspoons of a non-diet (sugar-based) soda pop or fruit juice. This duplicates the fructose content of nectar on which mosquitoes feed.
6. Reinstall the Liquid Catch Container into the Mega-Catch™ Mosquito Trap. Replace and lock the Door and remove the Key for child safety. Reconnect power.
7. Before removing the Liquid Catch Container, remember to disconnect the power to your Mega-Catch™ Mosquito Trap so that the Fan is not operational. Dispose of the contents well away from your dwelling so as to not attract ants.


Using the Catch Bag

To prepare your Mega-Catch™ Mosquito Trap, follow these steps:

1. Ensure that the Trap is switched off by disconnecting the power (**Attention: High-Speed Fan inside the Trap may cause injury if the power is not disconnected.**)
2. Unlock and remove the Lockable Door.
3. Reach inside the Trap and stretch the open neck of the Catch Bag around the corners of the base of the Fan just above the Fan Safety Guard (see figure 5). The Catch Bag has an elastic neck to facilitate attachment.
4. Replace and lock the Door and remove the Key for child safety. Reconnect power.
5. Before removing the Catch Bag pull the drawstring tight so that any mosquitoes that remain alive cannot escape. Next disconnect the power to your Mega-Catch™ Mosquito Trap so that the Fan is not operational and then remove the Catch Bag. Crush the top of the Catch Bag down on its base to kill any mosquitoes that do remain alive. Dispose of the contents well away from your dwelling so as not to attract ants.

Mosquitoes collected in the Catch Bag will usually die very quickly without access to moisture. In cooler climates they may live for a longer period. In times of heavy infestations of mosquitoes, it may be necessary to empty the Catch Bag on a regular basis in order to ensure optimum operation of the Trap.

FIG. 5 - Fitting of Catch Bag

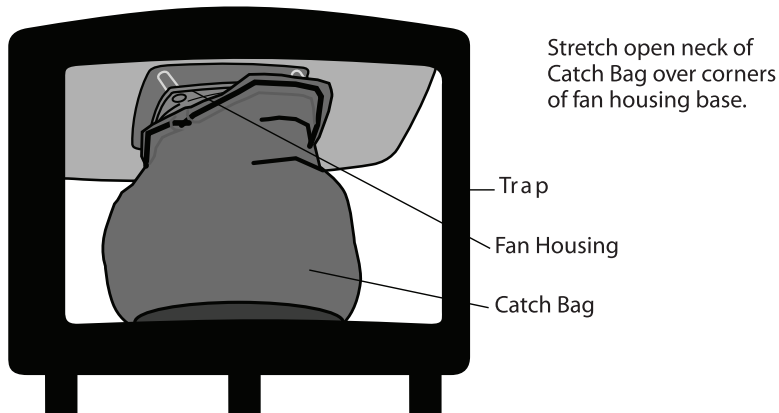

Catch Bags should be hand washed in warm soapy water from time to time. Catch Bags are a consumable item and replacements are available from your Authorized Distributor or online at www.megacatch.com.

Fitting of External Skirt

Your Mega-Catch™ Mosquito Trap comes with an External Skirt which fulfils two important functions. First its color and texture provides a visual attractant for many species of mosquitoes. Secondly, it acts as a baffle directing the air plume out of the bottom of the Trap.

There are two methods which you can use to fit the Skirt (Method One is the easiest for most people):

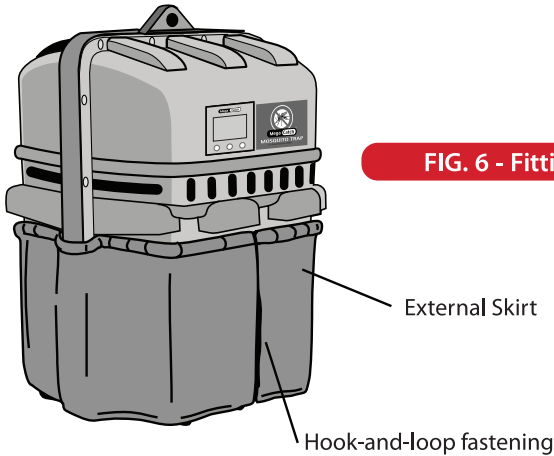


FIG. 6 - Fitting External Skirt

Method One:

1. Place the Mega-Catch™ Mosquito Trap on a table or other flat surface.
2. Slide the Skirt on from the top of the Trap (over 2 corners initially) with the elastic band at the top.
3. The Skirt is properly fitted when the elastic band is seated over the lower horizontal rib, just below the inlet holes (see figure 6). The opening in the Skirt should be located at the front of the Trap so as to facilitate removal of the Door without having to remove the Skirt. The hook-and-loop fastening on this opening should be closed when the Trap is running.

Method Two:

1. Hang the Mega-Catch™ Mosquito Trap from the Stand (see page 3, **Initial Setup Instructions** section - paragraph 6).
2. Slide the Skirt up from the bottom of the Trap (over 2 corners initially) with the elastic band at the top.
3. The Skirt is properly fitted when the elastic band is seated over the lower horizontal rib, just below the inlet holes (see figure 6). The opening in the Skirt should be located

at the front of the Trap so as to facilitate removal of the Door without having to remove the Skirt. The hook-and-loop fastening on this opening should be closed when the Trap is running.

NOTE: Failure to position the skirt correctly may result in a NIL mosquito catch.

The Skirt is not manufactured from a U.V.-resistant material but this will not be an issue if the Trap is operated in shaded conditions as recommended. The Skirt can be reversed should one side begin to fade from exposure to U.V. light. The Skirt is a consumable item and replacements can be obtained from your Authorized Distributor or online at www.megacatch.com.


Care of Your Trap

Your Mega-Catch™ Mosquito Trap requires very little maintenance. The Catch Bag and Liquid Catch Container should be cleaned and washed when required.

Heavy catches of mosquitoes may result in a build-up of material in the internal casing and blade tips of the Fan. There may also be a build-up of material on the Fan Safety Guard. If this happens use the following cleaning technique:

1. Ensure the power to your Mega-Catch™ Mosquito Trap is disconnected. **(Attention: High-Speed Fan inside the Trap may cause injury if the power is not disconnected.)**
2. To remove the Trap from the Stand, tip the Trap on its side and slide it off the hook.
3. Unlock and remove the Lockable Door. Then lay the Trap on its side with the Door opening being face up.
4. Reach inside the Trap and remove the Fan Safety Guard (attached to base of Fan) by turning it counterclockwise (see figure 7).
5. Using a small sponge or toothbrush and warm soapy water, reach into the Trap and carefully clean the inside casing of the Fan and the Fan Blades.
6. Ensure that water is not allowed to enter into the Fan Motor. Never hose water into the Fan.
7. Clean and then replace the Fan Safety Guard.
8. Leave the Trap to dry for at least 24 hours before reinstalling it on the Stand and recommencing operation.

FIG. 7 - Removal of Fan Safety Guard

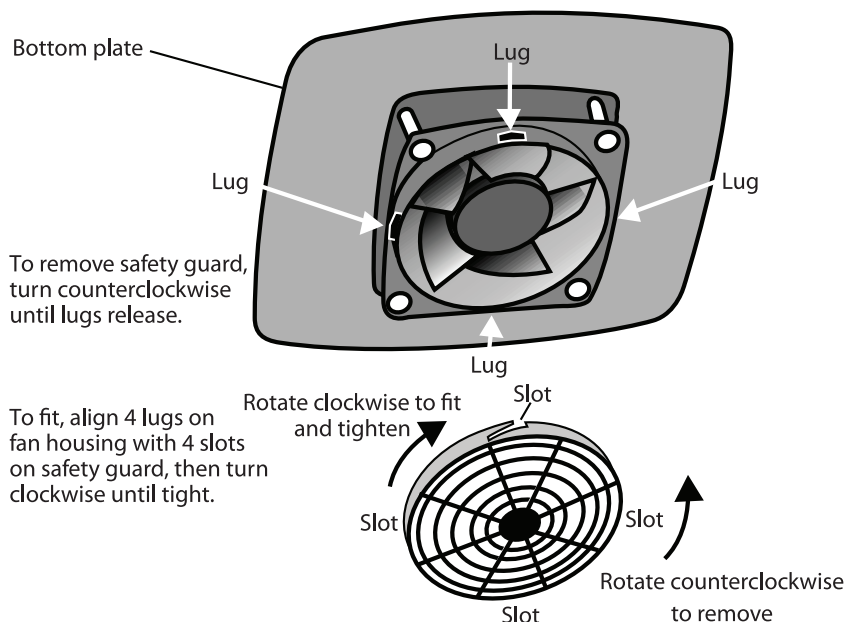

The casing of your Mega-Catch™ Mosquito Trap is made from polypropylene, which is extremely strong and durable.

In order to prolong the life of your Mega-Catch™ Mosquito Trap store it and the Mega-Catch™ Stand in a dry place when not in operation. Your Mega-Catch™ Mosquito Trap should be serviced at the end of each season (see page 29, **Maintenance and Repair of Your Trap** section).

Replacement of U.V. Tube

The U.V. Tube is a consumable item and replacements can be obtained from your Authorized Distributor or online at www.megacatch.com. To install a new U.V. Tube see page 29, **Maintenance and Repair of Your Trap** section.

Optional Accessories

The following Optional Accessories can be obtained from your Authorized Distributor or online at www.megacatch.com.

1. Mega-Catch™ Mosquito Lures


Mega-Catch™ mosquito lures have been specially formulated by Mega-Catch™ to increase capture rates of nuisance mosquitoes, sand flies, black flies and biting midges (no-see-ums).

NOTE: There are over 3,500 species of mosquitoes worldwide. Mega-Catch™ mosquito lures can improve the rate of capture of some mosquito species. Other species, may not be overly attracted. You should determine what is best in your area by experimenting with and without a Mega-Catch™ mosquito lure in place.

To install or replace a Mega-Catch™ mosquito lure:

1. Ensure the power to your Mega-Catch™ Mosquito Trap is disconnected.
2. Unlock and remove the Lockable Door.
3. Remove the Mega-Catch™ mosquito lure from its pouch and be careful not to touch the exposed holes on its surface. Place the lure inside the Trap in the position shown in figure 8 below. Replace and lock the Door and remove the Key for child safety. Reconnect power. Wash your hands after this procedure has been completed.

FIG. 8 – Placement Position for Mega-Catch™ Mosquito Lure

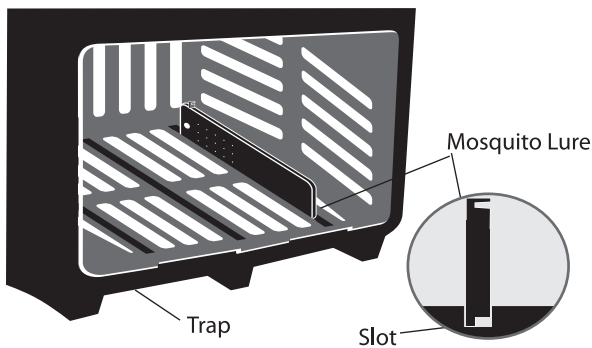

Place Mega-Catch™ mosquito lure in the trap as shown.

Mega-Catch™ mosquito lures should be effective for up to 30 days depending on weather conditions. Mega-Catch™ mosquito lures are a consumable accessory item and can be obtained from your Authorized Distributor or online at www.megacatch.com.

NOTE: Mega-Catch™ mosquito lures may not be available yet in your country for regulatory reasons.

ATTENTION: Keep Mega-Catch™ mosquito lures out of reach of children. Read directions and Important Safety Instructions carefully before use.

2. Battery Terminal Power Cable

The Mega-Catch™ Mosquito Trap can be operated from a 12-volt car battery as a power source using a factory-approved Power Supply Cable complete with positive and negative alligator clips.

3. Cigarette Lighter/Car Accessory Terminal Cable

The Mega-Catch™ Mosquito Trap can be operated from your vehicle's accessory terminal using a factory-approved Accessory Cable.

4. CO₂ Gas Regulator with Gauge

For quick and easy measurement of the CO₂ Cylinder gas level a factory-approved CO₂ Gas Regulator with Gauge is available.

5. Extension Cord

The Mega-Catch™ Mosquito Trap comes with a 60 foot(18 metre) low voltage Extension Cord. The Trap can be operated with up to 2 x 60 foot(18 metre) low voltage Extension Cords providing a placement range of up to 120 feet(36 metres) from the power source.

6. Weather Proof Cover

To shelter your trap from the weather when not in use a Mega-Catch™ Weather Proof Cover is available.

7. Fine Mesh Catch Bag

A Mega-Catch™ Fine Mesh Catch Bag can be used when trying to capture very small biting insects such as no-see-ums.

Maintenance and Repair of Your Trap

Opening the two halves of the Mega-Catch™ Mosquito Trap will be necessary for the following purposes:

- Replacement of U.V. Tube.
- Annual service (At the end of each season, the Internal Plates, reflective Heater Element and Fan should be cleaned using warm soapy water and allowed to dry thoroughly).
- Battery replacement (The Control Box contains a Lithium Coin Cell Battery that provides power to the Trap's memory storage for recording the Trap settings). When the battery reaches the end of its useful life it will require replacement and then must be disposed of correctly. For assistance contact info@megacatch.com.

Opening the Trap (see to figure 9.1):

ATTENTION: Always disconnect the power to your Mega-Catch™ Mosquito Trap before opening the Trap.

The two halves of the Trap are held together with 12 stainless-steel screws and nuts - six facing one way and six the other way.

Place the Trap on a table ensuring the LCD module is on the side facing down. Remove the six screws facing toward you using a Phillips screwdriver.

Then turn the Trap over (so that it is "LCD module" up) and remove the remaining six screws.

Then lift the top half of the Trap away from the bottom half as if it was hinged at the top. The top half should now be "LCD module side" down on the table and still connected to the bottom half by electrical cables.

The Top Plate holds the Control Box and the U.V. Tube and holders (both underside of Top Plate).

The Bottom Plate holds the reflective Heater Element (upperside of Bottom Plate) and the Fan (underside of Bottom Plate).

Replacement of U.V. Tube (see to figure 9.2):

Remove the U.V. Tube by twisting the tube gently until it is able to be removed. Then slot a new U.V. Tube into the connector ends and twist the tube gently until it is firmly in position.

FIG. 9.1 – Opening the Pro 900 Series ULTRA Trap

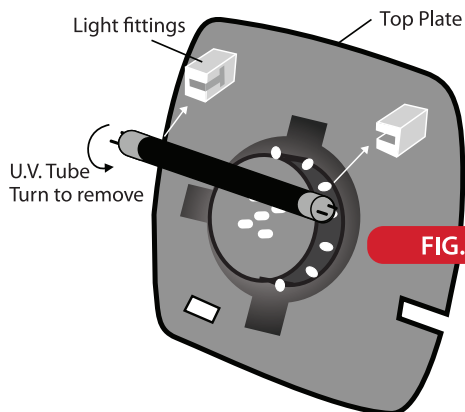
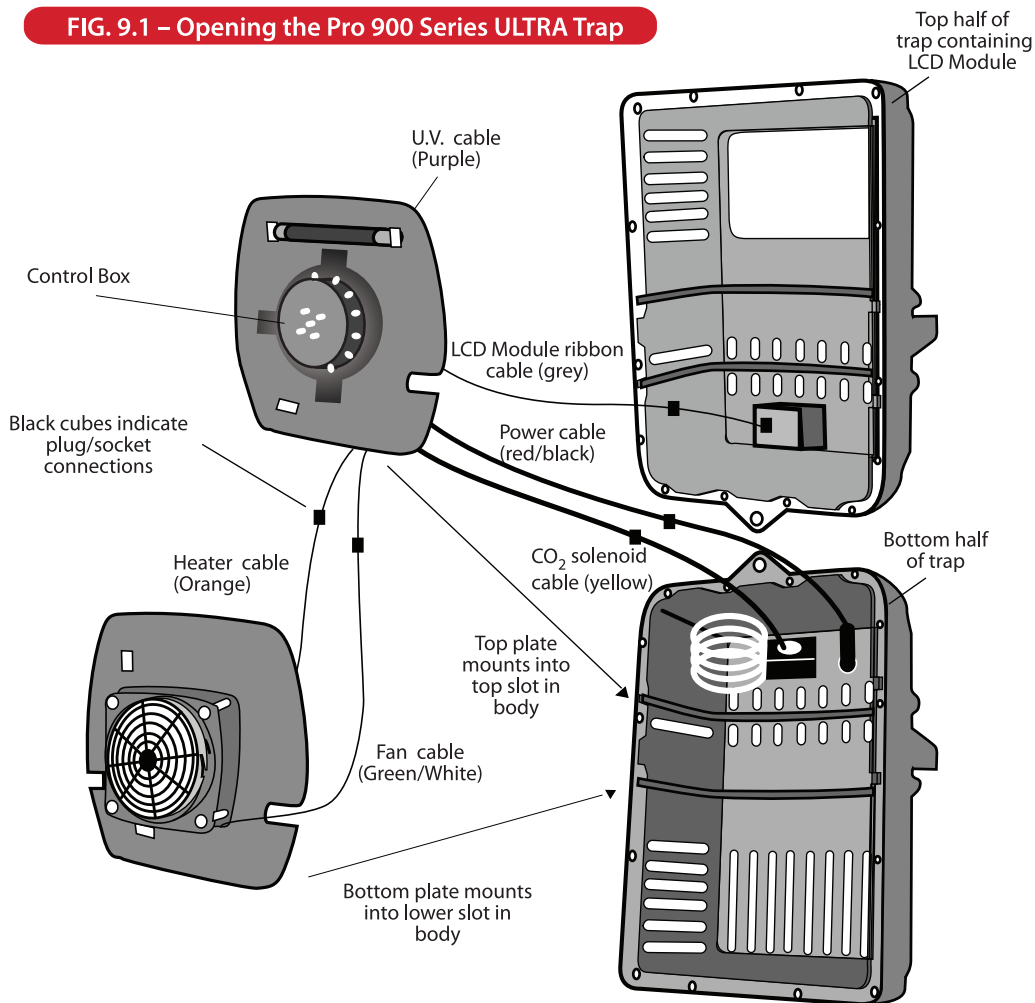


FIG. 9.2 – Replacement of U.V. Tube

Reinstallation of Plates:

You should not have any reason to remove the plates from the Trap. If however you do, merely slot the plates back into the ribs so that the Control Box is on the under-side of the Top Plate and the Fan is on the under-side of the Bottom Plate. There are arrows on each plate that point to the bottom half of the Trap (i.e. the half that does not contain the LCD Module). To aid with reassembly there are also colored locator dots on the top of the plates and inside the rear of the trap. Align the green dot on the Top Plate with the green dot inside the trap rear and the yellow dot on the Bottom Plate with the yellow dot inside the trap rear.

Connection of Wires:

You should not have any reason to remove any of the electrical connections. If however you do you should note all electrical connections are by push-in pin connectors. Cables are color coded so it is easy to determine which plug connects to which socket (see figure 9.1).

Re-assembly of Trap:

Fitted to the groove around the top inner surface of the Trap is a rubber seal. This seal pushes into place for weather protection and should be reinstalled prior to final assembly of the Trap. The seal is formed to the shape of the trap. Check the seal is undamaged before it is reinstalled and the Trap is re-assembled.

With the Top and Bottom Plates in place replace the "LCD Module side" or top half of the Trap ensuring that each plate slots into the locating ribs. The 12 screw holes should now be aligned for replacement of the screws. Carefully screw in the screws.

NOTE: Do not overtighten the screws. This could cause the nuts to rotate and damage the pre-formed hexagonal pockets in the plastic housing.

Frequently Asked Questions

1. How soon should the Mega-Catch™ Mosquito Trap begin to catch mosquitoes?

While the Mega-Catch™ Mosquito Trap has been designed to catch immediately there is any mosquito activity in the vicinity, it may take as much as 6-8 weeks of use to reduce local populations to the point that breeding cycles are interrupted. Subsequent re-infestations will probably occur after rain.

2. Will my Mega-Catch™ Mosquito Trap get rid of all the mosquitoes in the area?

No. There is no single silver-bullet to eliminate mosquitos. The best you can do is devise an effective mosquito management plan for your area, using the best available control strategies, including one or more Mega-Catch™ Mosquito Traps.

3. How often do I need to operate my Mega-Catch™ Mosquito Trap?

Before using your Mega-Catch™ Mosquito Trap note the time of day when mosquito activity is greatest. If, for example, this is in the morning and the evening, then you should set the Trap (using the LCD Module) to operate at these times. Where your mosquito problem involves night time biters, we recommend operation of the Trap between 7pm and 11pm and 4am and 8am. If mosquito activity is all day, then you may need to operate the Trap 24 hours per day until the mosquito population declines.

4. How many traps should I buy for around my house?

This depends on the size of your property. Generally we recommend one or two Traps depending on the number and location of mosquito breeding areas on your property. A Mega-Catch™ **Pro 900 Series ULTRA** Mosquito Trap with CO₂ can, in favorable weather conditions, attract mosquitoes from up to 150 feet(45 metres) away.

5. Will Mega-Catch™ Mosquito Traps catch biting flies?

In addition to mosquitoes the Mega-Catch™ **Pro 900 Series ULTRA** Mosquito Trap will catch sandflies, black flies and biting midges (no-see-ums) and many other types of biting insect.

6. Can I stop my Mega-Catch™ Mosquito Trap from catching moths?

The Mega-Catch™ **Pro 900 Series ULTRA** Mosquito Trap incorporates a low-intensity U.V. Tube and U.V. LEDs which emit light at frequencies our research has shown to attract certain mosquito species. Unfortunately they can also attract small quantities of non-target species like moths. If this is a problem, the U.V. Tube can be switched off and/or the U.V. LED intensity reduced, or turned off, via the LCD Module.

7. What should I do if my Trap isn't catching mosquitoes?

First check that your trap is operating properly, ie the lights and fan are working and the external skirt has been positioned correctly. Secondly remember that catching mosquitoes is like fishing. There are over 3,500 mosquito species worldwide (and probably as many as 30 species in your locality) so you may need to experiment to optimize the performance of the trap in your location. See separate sheet headed "Mosquito Trap Optimization" for recommendations on optimizing the performance of your trap. Finally, if you are still having problems email us at info@megacatch.com.

8. Does my Mega-Catch™ Mosquito Trap use much power?

No. When operating , the Mega-Catch™ **Pro 900 Series ULTRA** Mosquito Trap uses less power than a 40 Watt light bulb

Problem Solving

DESCRIPTION of PROBLEM	CHECKS
Trap fails to operate	Check that the Trap is turned on (see page 14, Operation of the LCD Module section).
	Check that the Power Cable is properly connected to both the Trap and the mains, and that the power is switched on. Try plugging the Trap into a different wall socket power outlet.
	Check that the power cable has not been damaged, e.g. by a lawn mower or animals (squirrels, dogs or racoons etc...).
	Check that the Timer, if set to operate(see page 17, Setting the Timer section), is set to operate at the time you are checking its operation.
Lights in the Trap come on but the Fan fails to operate	Check whether there has been a build up of material in the Fan and/or Fan Safety Guard which is preventing the Fan blade from turning (see page 25, Care of Your Trap section).

If these steps fail then email us at info@megacatch.com - or call the Service Centre number shown on the separate Warranty Certificate.

NOTE: Do not attempt to access the internal electronic components of your Mega-Catch™ Mosquito Trap. Opening of sealed units will void your warranty.

Need Help?

For service, repair or any questions concerning Mega-Catch™ products, email us at info@megacatch.com - or call the Service Centre number shown on the separate Warranty Certificate. Do NOT return products to the place of purchase. Do NOT return products to an Authorized Distributor. You may also want to consult our website: www.megacatch.com.


Specifications

Power Source
Input 100-240 VAC, 50/60 Hz
Output 12 VDC, 42 Watt

U.S. Design Patent No: 449,091
U.S. Patent No: 6,199,316
U.S. Trade Mark Reg. No: 2,679,688
Canadian Trade Mark Reg. No: TMA 623,018



Parts List

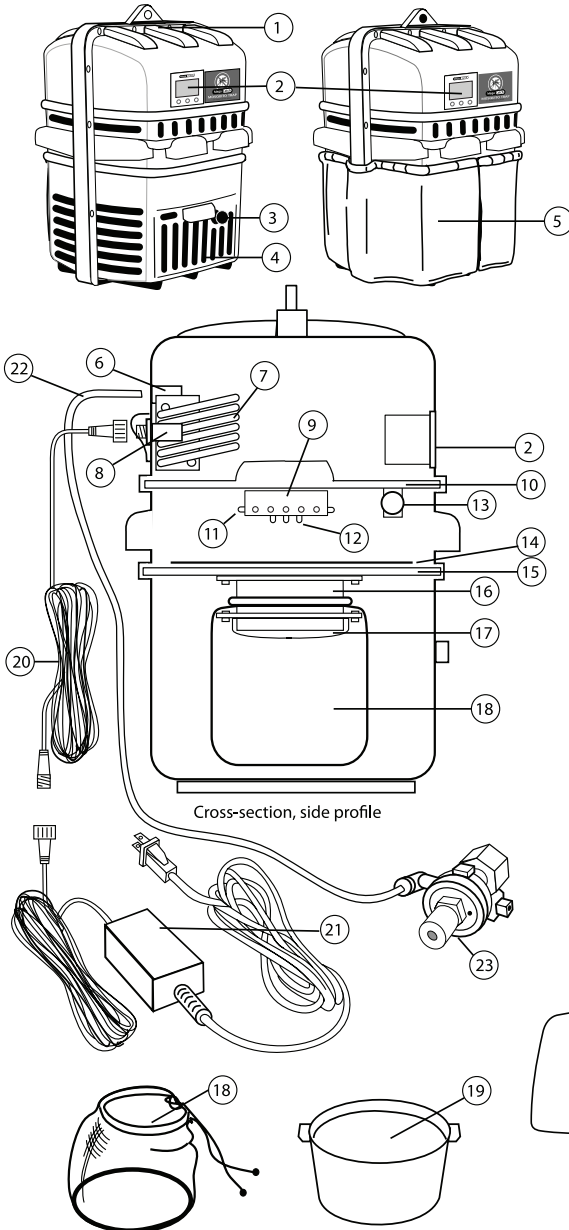

Description	Part No.
1. Mega-Catch™ Pro 900 Series ULTRA Mosquito Trap	MCU-900
2. LCD Module	MC-PU01.1
3. Key	MC-PU208
4. Lockable Door	MC-PU203
5. External Skirt	MC-PU112
6. CO ₂ Gas Solenoid / Coil	MC-U303 / MC-U304
7. CO ₂ Expansion Coil	MC-U306
8. Power Connection	MC-PU10
9. Control Box	MC-PU05
10. Top Plate	MC-PU205
11. U.V. Light Emitting Diodes (LEDs)	
12. Central LED Cluster	
13. U.V. Tube	MC-PU2
14. Heater Element	MC-PU211
15. Bottom Plate	MC-PU206
16. Fan Unit	MC-PU210
17. Fan Safety Guard	MC-PU209
18. Catch Bag	MC-PU111
19. Liquid Catch Container	MC-PU204
20. 60ft Extension Cord	MC-PU7
21. Power Supply	MC-PU246
22. CO ₂ Gas Tubing	MC-U305
23. CO ₂ Gas Regulator	MC-U301



Product made in China for:
EnviroSafe Technologies International Limited
Unit 10, 6 Omega St, Albany
Auckland, New Zealand
info@megacatch.com www.megacatch.com

Mega-Catch™ is a trademark of EnviroSafe Technologies International Ltd.